

単焦点サポートレンズシリーズ

メモサポート160

特長特長

◎HEV(高エネルギー可視光線)を効果的にカットするメモシリーズ

●遠用エリアとサポートエリアの2つのエリアで眼をサポートするサポートレンズシリーズ。

・近くを見る際の調節力を補助し、眼が楽に感じられる

・慣れやすくすっきりとした自然な掛け心地で、どのような場面でもご利用頂ける常用レンズ



・近くをみる環境が多く、視緊張による眼の疲れや肩・首のこりなどを感じている10代~30代の方におすすめ

- プリズムシニング加工。
- UV吸収剤練り込み素材
- 紫外線UV-A・Bカット

球面	乱視 (-)															
度数	-	0	0	0	1	1	1	2	2	2	3	3	3	3	4	
		0	2	5	7	0	0	2	5	7	0	0	2	5	7	0
0.00		5	0	5	0	5	0	5	0	5	0	5	0	5	0	
0.25																
0.50																
0.75																
1.00																
1.25																
1.50																
1.75																
2.00																
2.25																
2.50																
2.75																
3.00																
3.25																
3.50																
3.75																
4.00																
4.25																
4.50																
4.75																
5.00																
5.25																
5.50																
5.75																
6.00																
6.25																
6.50																
6.75																
7.00																
7.25																
7.50																
7.75																
8.00																
8.25																
8.50																
8.75																
9.00																
9.25																
9.50																
9.75																
10.00																

球面	乱視 (+)															
度数	+	0	0	0	1	1	1	2	2	2	3	3	3	3	4	
		0	2	5	7	0	0	2	5	7	0	0	2	5	7	0
0.00		5	0	5	0	5	0	5	0	5	0	5	0	5	0	
0.25																
0.50																
0.75																
1.00																
1.25																
1.50																
1.75																
2.00																
2.25																
2.50																
2.75																
3.00																
3.25																
3.50																
3.75																
4.00																

混合乱視 (MIX)																度数				
0	0	1	1	1	2	2	2	3	3	3	4						±			
5	7	0	2	5	7	0	2	5	7	0	2	5	7	0						
0	5	0	5	0	5	0	5	0	5	0	5	0	5	0		0.25				
																0.50				
																0.75				
																1.00				
																1.25				
																1.50				
																1.75				
																2.00				
																2.25				
																2.50				
																2.75				
																3.00				
																3.25				
																3.50				
																3.75				

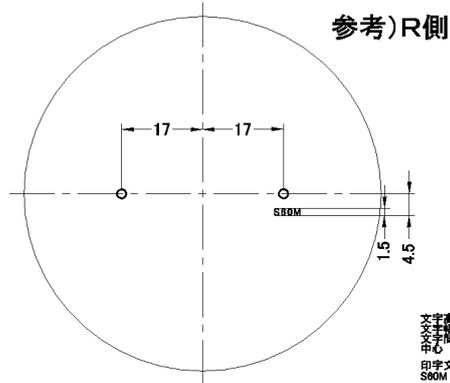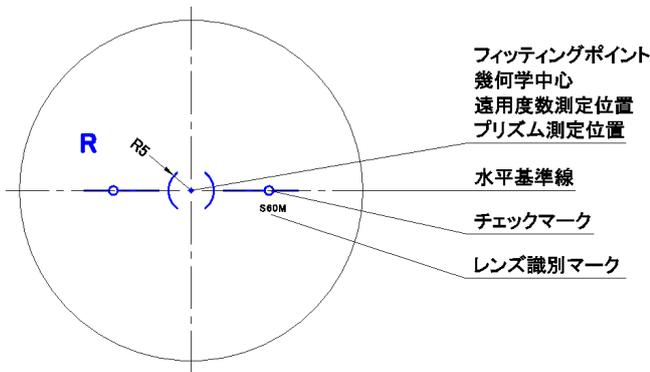

仕様

- 材質 高屈折プラスチックレンズ
- 屈折率 1.60
- 比重 1.31
- アッペ数 42

特注条件

プリズム	○	0.25△~3.00△まで(0.25とび) スリ残しが出ることがあります。
偏心	×	-
外径指定	○	プラス・ミックスのみ 径小は55mmまで(1mmキザミ)
フチ厚指定	○	-
スレンダー/薄型加工	○	プラス・ミックスのみ
カラー	○	アリアーテ・見本色 受注可 DLCカラー受注可
UVカット	○	標準装備
注意事項		●遠用度数測定位置で、レンズメーカーの十字が出ませんが、中心の点をフィッティングポイントとして加工をお願いします。 ●レンズに上下方向がありますので、ご注意ください。 (「R」が書いてある方が上方向です。)